



Heat Proof Digital Crane Scale

Model: OCS-SH



Main Technical Data


Accuracy Standard	According to OIML class III
Display	30mm (1.2") 5digits LCD/LED
Filtering	Low,Medium or High selectable
Units	Kilograms or Pounds selectable
Resolution	2000 to 3000 divisions standard up to 15,000 available
Zero Range	4% F.S.
Tare Range	100% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	700% F.S.
Battery Type	Fully sealed Lead-Acid battery, 6V/7Ah
Battery Life	≥70 hours
Adapter	DC 9V/1000mA
Operating Temperature Range	- 20℃ ~ + 50℃
Operating Humidity	≤85% RH under 20℃
Remote Controller Distance	Max. 15m
Battery of Remote Controller	AAA battery, 1.5V × 2
Acceleration of Gravity	9.793, Can be regulated

Features

- ◆ Enclosure:
NEMA 12/IP54 powder coated Alodined Cast Aluminum.
- ◆ Multi-weighing units:
Kg, lb are selectable, kg are default unit.
- ◆ Multi-function operation:
Tare, Zero, Auto zero tracking, Total, Hold, Overload warning and record, operated through infrared remote controller.
- ◆ User-friendly design:
Large red 5 digit LED display - digit height 30 mm, Battery Operated with low battery indication, Automatic turn off , power-saving function.
- ◆ Gravity regulation:
The acceleration of gravity can be regulated through remote controller according to different places value.
- ◆ Multi options:
RS-232-continuous or on demand data output, user-selectable
Wireless big screen 3", 5", wireless handheld indicator 180, 380 and 580 can match with the scale, user- selectable.

Min Distance between Scale and High Temperature

1000℃	1200℃	1400℃	1600℃
1.6m	1.8m	2m	2.2m

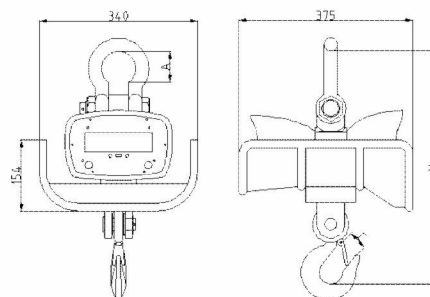

Dimensions and Specifications

MODEL	Cap.(kg)	Resolution (kg)	A(mm)	C(mm)	H(mm)	N.W(kg)	G.W.(kg)
OCS-SH-1	1000	0.5	100	40	600	24	27
OCS-SH-2	2000	1	100	40	600	24	27
OCS-SH-3	3000	1	130	45	720	33	36
OCS-SH-5	5000	2	145	60	850	50	55
OCS-SH-10	10000	5	170	85	900	75	78
OCS-SH-15	15000	5	190	85	920	80	86

